

# IPW24M

1 1/2" DRIVE HYDRAULIC IMPACT WRENCH

3500 ft/lbs - 26 lbs

The IPW24M heavy duty impact wrench produces up to 3500 ft/lbs of impact torque

The ORI IPW24 is a heavy duty 1 1/2" square drive impact wrench designed for underwater use with all stainless fasteners and sealed impact mechanisms that works equally well on land.

The IPW24M has a proven, made in the USA, impact mechanism that is easy to maintain. The swing hammer design greatly reduces the transmission of torque reducing operator fatigue.


Designed to run from a wide range of hydraulic circuits. A "D" style trigger handle and a multi-position assist handle, and standard reversing valve provides instant change from forward to reverse.

Just set the direction of rotation to either tighten or loosen, and squeeze the trigger for up to 3500 ft lbs of impact torque.

The logo for HDI (Hydraulic Drive Industries) features the letters 'HDI' in a bold, white, serif font with a thick black outline. A red swoosh underline is positioned beneath the letters, starting under the 'H' and ending under the 'I'.

# IPW24M

## 1.5" DRIVE HYDRAULIC IMPACT WRENCH

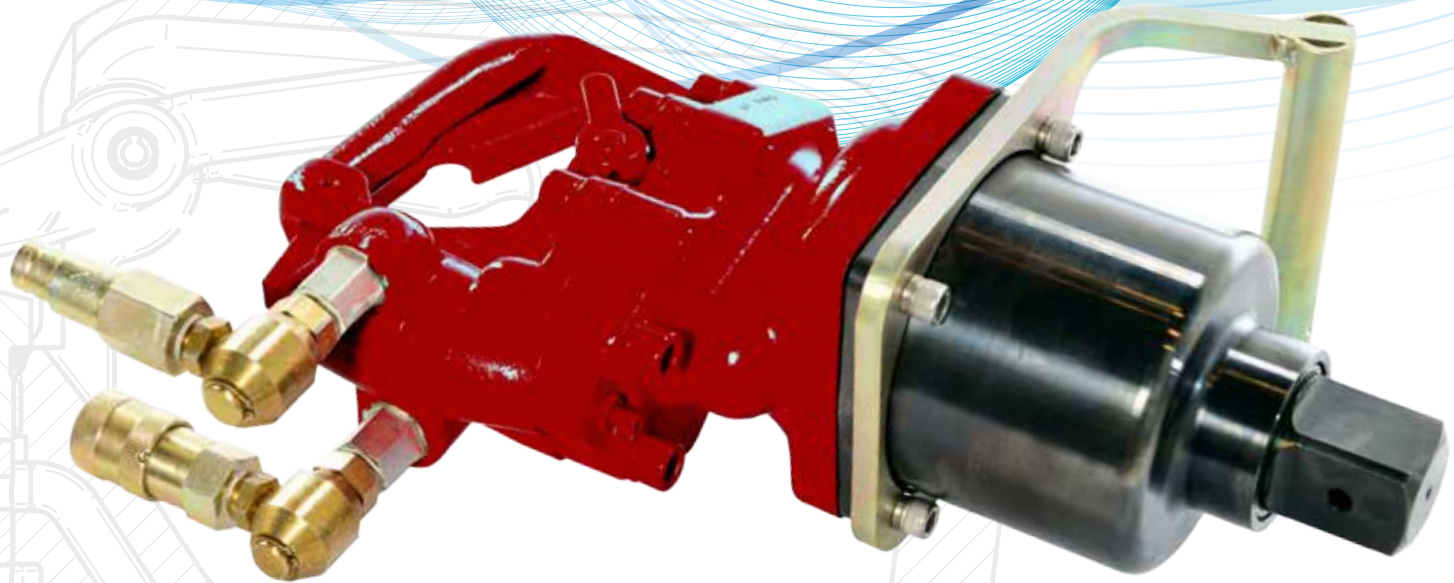

### IPW24M 1.5" DRIVE IMPACT WRENCH SPECIFICATIONS

Drive	1.5 in Square Drive*	1.9 cm
Output Energy	750-3500 ft lb	1000-4750 Nm
System	Open Center	
Hydraulic Flow Range	7-12 gpm	25-45 lpm
Weight	26 lb	12 kg
Length	14.5 in	370 mm
Width	4.5 in	110 mm
Maximum Pressure	2000 psi	138 bar
Maximum Back Pressure	250 psi	17 bar
Porting	-8 SAE O-ring	

\*Optional Spline Drive

Assembled and Tested  
in USA using Global Materials

Please  
Read the  
Manual



**WARRANTY** - Hydraulic impact wrenches and their associated parts are warranted against defects in materials and workmanship for a period of twelve months from the date of purchase. ORI reserves the right to repair or replace only those parts which prove to have been defective at the time of purchase. This warranty becomes void if maximum flows or pressure ratings are exceeded.

HDI  
PO Box 1671  
Gresham OR 97030

wrenches@HDI-inc.com  
206 247 4855 (FAX)

