

IPW12M

3/4" DRIVE HYDRAULIC IMPACT WRENCH

1200 ft/lbs - 14 lbs



The IPW12M heavy duty impact wrench produces up to 1200 ft/lbs of impact torque

The high-torque, high-speed, IPW12M impact wrench features adjustable impact intensity that can handle a wide variety of applications. Specifically designed for underwater use with all stainless fasteners and sealed impact mechanisms, it works equally well on land. Proven reliability, the IPW12M is rugged and easy to maintain and it's made in the USA impact mechanism is industry proven.

A standard reversing valve provides instant reverse and a shock absorbing plastisol covered handle transmits very little heat and provides a more comfortable grip.


Just set the direction of rotation to either tighten or loosen, and squeeze the trigger for up to 1200 ft lbs of impact torque.



HDI

IPW12M

3/4" DRIVE HYDRAULIC IMPACT WRENCH

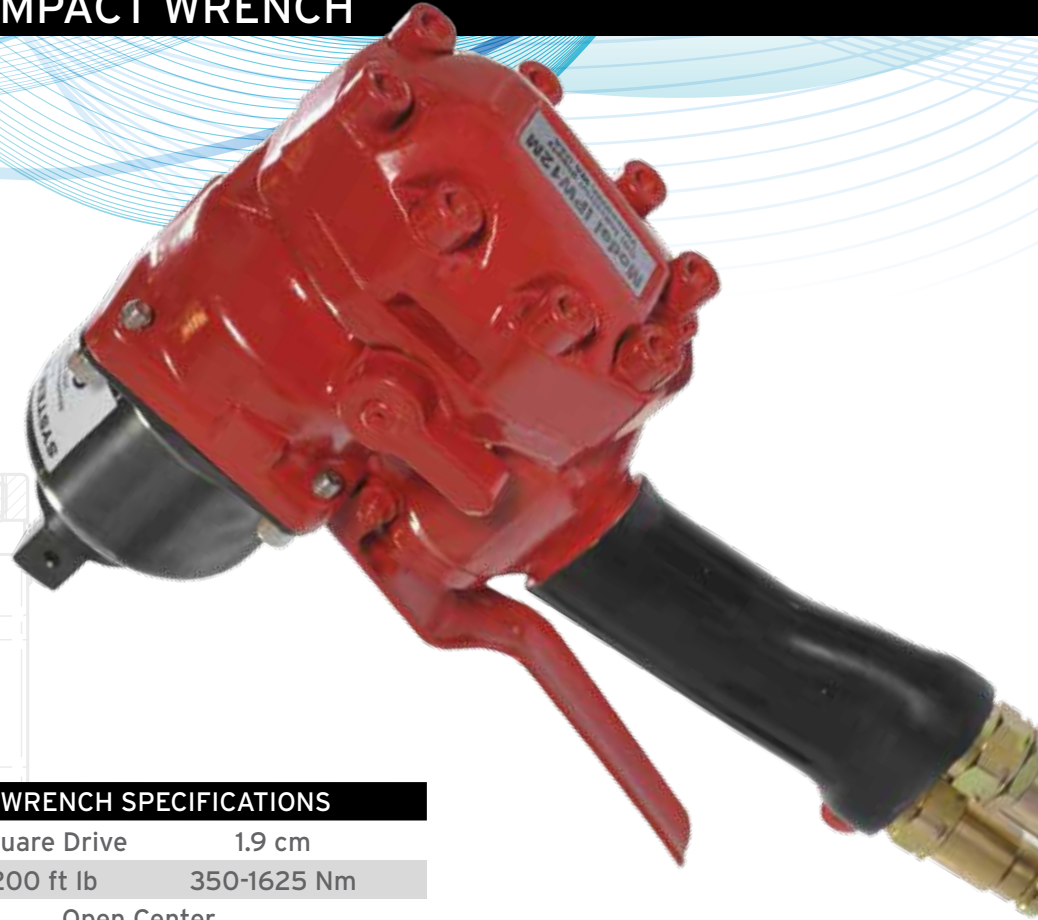

IPW12M 3/4" DRIVE IMPACT WRENCH SPECIFICATIONS

Drive	3/4 in Square Drive	1.9 cm
Output Energy	250-1200 ft lb	350-1625 Nm
System	Open Center	
Hydraulic Flow Range	5-12 gpm	20-45 lpm
Weight	14 lb	6.4 kg
Length	9.5 in	241 mm
Width	4 in	100 mm
Maximum Pressure	2000 psi	138 bar
Maximum Back Pressure	250 psi	17 bar
Porting	-8 SAE O-ring	

WARRANTY - Hydraulic impact wrenches and their associated parts are warranted against defects in materials and workmanship for a period of twelve months from the date of purchase. ORI reserves the right to repair or replace only those parts which prove to have been defective at the time of purchase. This warranty becomes void if maximum flows or pressure ratings are exceeded.

Assembled and Tested
in USA using Global Materials

Please
Read the
Manual



HDI
PO Box 1671
Gresham OR 97030

wrenches@HDI-inc.com
206 247 4855 (FAX)

HDI